




TERMINATOR E-MOBILE

Shredder for
all types of waste



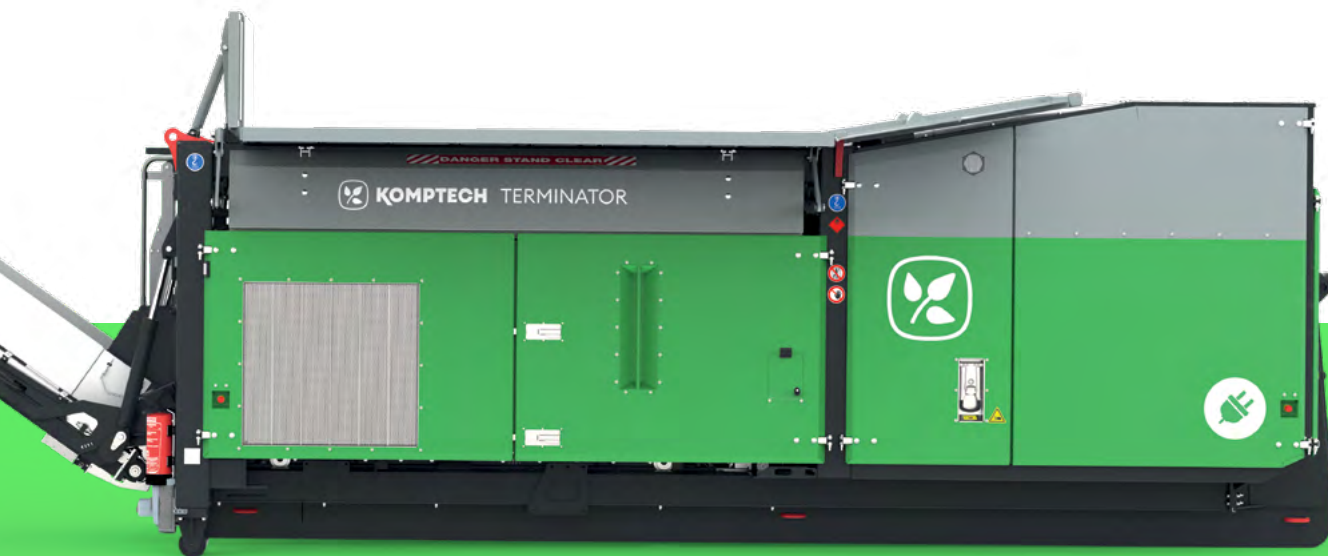

OVERVIEW

Low-speed single-shaft shredder for all types of waste

The Terminator is one of the most successful single-shaft shredders for all types of waste. The new e-mobile series adds semi-mobile electric-powered versions to the line-up, featuring maintenance-free electric motors instead of diesel engines. The concept combines the compact design and flexibility of a mobile machine with the energy efficiency of a stationary machine. The hydraulic drum drive with load-dependent speed control develops the highest shredding forces. Stepless cutting gap adjustment allows sizing of the output for its intended purpose. A modern control panel and easy access to all maintenance points ensure a high level of comfort in everyday work.

- ▶ Shreds even the toughest materials
- ▶ Xtron version for even more versatility
- ▶ Choice of shredding units for a perfect fit with the application
- ▶ High efficiency and minimal maintenance due to electric motor



Electrical power (kW)

160
↓
280

Max. Throughput (t/h)

45
↓
100

Gross weight (t)

21.1
↓
25.5

Wide range of applications



01 Bulky waste, commercial waste

The highest possible shredding force is required for these inhomogeneous waste streams. The Terminator's powerful drive delivers it. The F or XXF unit is used depending on the desired degree of shredding, or the V unit (xtron) for particularly bulky materials.

02 Household waste

These waste streams call for consistent shredding and long tooth life. That's what the F-unit offers; its armoured teeth and easily replaceable wear protectors keep operating costs low.

03 Waste wood

The bigger the shredder's feed hopper, the better, especially for waste wood. The Terminator's hopper is larger than just about any comparable machine. The aggressive feed of the V shredding unit and programmable reverse cycles keep throughput high.

04 Special applications

The Terminator shreds pretty much anything, from production waste to white goods to mixed C&D waste. Even tyres, whether auto or special purpose, are chewed up by the high tooth force developed by the V and XXF units.

Applications	F	V	XXF
Waste wood	+	++	+
Green waste	0	+	-
Bulky waste, commercial waste	+	++	++
Household waste	++	0	0
Special applications (Tyres etc.)	+	++	++

++ ... very suitable | + ... well suitable | 0 ... suitable | - ... not suitable



The machine in greater detail

Every Komptech machine meets the highest requirements for dependability and value retention. This is assured by the use of high-quality components, certified production and gapless quality control.



01



Electric motor

- Three-phase asynchronous motor with high efficiency (up to 95 %)
- No local exhaust emissions at the operating site, 100% CO₂ reduction
- Fully encapsulated engine compartment to reduce noise emissions

02



Drum drive

- Hydraulic drum drive with load-dependent speed control
- Overload protection to protect drum and engine
- S version options: Double drum drive for higher shredding force

03



Shredding unit

- Two different shredding units for different materials
- Hydraulically adjustable counter comb for setting the particle size
- Efficient shredding by teeth with cutting edges

04



Operation

- Operating panel with a 7" high resolution screen and intuitive menu guidance
- Reversing program to adapt to the material and for drum self-cleaning
- Onboard diagnostics, with trouble-shooting integrated into the control system for fast problem solving

05



Flexibility

- Connection and disconnection by single plug system, easily be done by just one person
- Minimum time needed for startup, enabling flexible use at multiple sites
- Compact mobile machine design with road approval

06



Maintenance

- Generously sized doors for optimal access to all maintenance points
- Maintenance-free electric motor
- Optimum protection of all components through solid engine compartment cladding and special control cabinet


Mobility



Shredding



Drum drive





AT WORK

In daily use

Over seven cubic metres hopper volume

Just load material into the big hopper – the machine does the rest. Hydraulically folding hopper sidewalls make the already generous shredding chamber even bigger.

Efficient shredding

The use of an electric motor instead of a diesel engine offers significant advantages in energy efficiency. Electric motors can have efficiencies up to 95 percent, while diesel engines max out at 30 to 35 percent. With comparable throughput, up to 70 percent of the energy costs can be saved this way. At the same time, maintenance costs are reduced by up to 30 percent.

Terminator x(crossfunctional)tron(strong)

The xtron version is equipped with the V shredding unit, which is suitable for all types of waste, but especially for waste wood and green waste. With a performance of 280 kW, an optimised hydraulic system and optional comb elements, the Terminator xtron offers outstanding versatility in waste processing.

Clean running

No exhaust gases, minimal noise emissions due to full encapsulation of the drive, and suitability for indoor or outdoor use, all make the electric shredder the ecologically sustainable solution. The higher the proportion of renewables in the energy supply, the more CO₂ can be saved by comparison with a conventional diesel engine. In best cases the CO₂ savings can be 100 percent.

Ready for anything

Options let users configure the Terminator for the exact task. Wireless remote control and central lubrication add to ease of use, a moistening system keeps dust down, and an extended discharge conveyor allows high discharge cones. The over-conveyor magnet can be exactly aligned with the discharge conveyor position, for optimum separation performance. New: Throughput measurement with evaluation via Connect!.



Functions

rpm
10%

Steplessly adjustable drum speed

P₁

Reversing programs

W

Adjustable cutting gap

Operations

W

Adjustable hopper walls

MEDIUM

Contaminant detection

CONNECT!

Condition Monitoring

Options

Remote control

Moistening equipment

Adjustable overbelt magnet

Throughput measurement 1-8



SERVICE



The Komptech plus



Top advice

We'll show you how to optimize your processes, based on our experience and extensive data analyses.



All-in solutions

From individual mobile machines to complex stationary systems, with us you get the right process solution.



Service near you

Expert technicians are on-site quickly to make sure your machines keep running.



Productivity in view

Apps and integrated monitoring let you keep an eye on operating data and economy.



Spare parts always available

Intelligent stocking for the fast, economical provision of high-quality spare parts.



Need-based service

Our maintenance and service agreements, as well as extended warranties, are aligned with your needs.



Overview of our technology



Look here for the newest updates, specifications and more detailed descriptions:

Model	3400 ▼	3400 S ▼	5000 ▼	5000 S ▼	6000 S / xtron ▼
--------------	------------------	--------------------	------------------	--------------------	----------------------------

Engine

Type Electric motor	Asynchronous motor	Asynchronous motor	Asynchronous motor	Asynchronous motor	Asynchronous motor
Power (kW)	160	160 Drum drive on both sides	220	220 Drum drive on both sides	280 Drum drive on both sides

Loading heights

Loading heights (mm)	Hook: 2.396 Trailer: 2.997 Track: 2.898
Discharge heights (mm, 35°)	Hook: 3.709 Trailer: 4.250 Track: 4.151

Shredding unit

Drum rpm (min⁻¹)	max. 29	max. 27	max. 29	max. 29	max. 38 / 29
Drum length (mm)	3.000	3.000	3.000	3.000	3.000
Drum diameter (mm)	1.050	1.050	1.050	1.050	1.050 / 1.170

Dimensions in transport position/working position (conveyor belt 35°)

Hook – L x B x H (mm)	7.290 x 2.500 x 2.766	11.722 x 3.290 x 3.709
Trailer – L x B x H (mm)	9.064 x 2.549 x 3.453	13.497 x 3.290 x 4.250
Track – L x B x H (mm)	6.940 x 2.854 x 3.268	11.372 x 3.290 x 4.151

Weight (dependent on equipment)

Hook (t)	21,1	21,9	21,3	22,1	22,6
Trailer (t)	23,9	24,7	24,1	24,9	25,5
Track (t)	25,0	25,8	25,2	26,0	26,5

Throughput (dependent on material)

Throughput (t/h)	up to 45	up to 50	up to 60	up to 80	up to 100 / up to 90
-------------------------	----------	----------	----------	----------	----------------------

Hook (hook lift chassis)



Trailer (3-axle trailer)



Track (Crawler chassis)





Never waste an opportunity.

 **SRS**
EQUIPMENT INC.

Luke Ellens
DIRECTOR, SALES & SERVICE

Cel. 905 979 2640
lellens@srsequipment.ca

1100 South Service Road,
Suite 419, Stoney Creek,
Ontario, Canada L8E 0C5

srsequipment.ca

 **SRS**
ÉQUIPEMENT INC.

Nicolas Morin
VENTES D'ÉQUIPEMENT,
PIÈCES & SERVICE (QUEBEC)

Cel. 514 838 1075
nmorin@srsequipment.ca

1100 South Service Road,
Suite 419, Stoney Creek,
Ontario, Canada L8E 0C5



srsequipment.ca

© Komptech GmbH | Q2 2024. No liability accepted for changes, errors and misprints. Printed on PEFC-certified paper, which was produced in Styria, Austria.

We create value for you



Waste-stream expertise

Because you need a setup that is tailored to your waste stream.



Innovative technology

Because you need to adapt your output to your market needs.



Flexible sales models

Because you have the choice between new, rental and used machines.



Service excellence

Because you always need to keep your system running.